

Mid Pressure Aluminum Filters



A unique range of 725 psig die cast aluminum filters providing exceptional value & performance.

The nano F-Series³ range of mid pressure filters consists of nine models in three different housing designs.

Manufactured from machined and die cast aluminum and polyester powder coated for optimum corrosion protection, the nano F-Series³ are designed for the unique demands of high pressure applications.

These filters incorporate an innovative push-fit element design with dual o-ring seals to ensure optimum sealing and mechanical strength.

Models up to 1882 scfm

Choose from five different elements including 25, 5, 1 and 0.01 micron coalescing and/or dust filtration, and activated carbon oil vapor removal. The custom engineered filter media is designed to provide low air velocity preventing oil carry over for high efficiency filtration with minimal pressure drop.

Manufactured in an ISO 9001 approved facility and tested in accordance with ISO 8573-1:2010.



Applications Include:

Chemical

Food & Beverage

Manufacturing

Military

Oil & Gas


PET

nano-purification solutions
11330 Vanstory Drive
Huntersville, NC 28078
USA

Tel: (704) 897-2182
Fax: (704) 897-2183
Email: support@n-psi.com
web: www.n-psi.com

Technical Specification

Filter Model	Inlet & Outlet	Rated Flow ⁽¹⁾		Dimensions (inches)				Approx. Weight	Replacement Element Kit
	NPT	scfm	Nm ³ /h	A	B	C	D	lbs	Part No.
N50A 0094 (grade)	¼"	94	160	2.5	0.6	5.9	2.0	1.3	E50HP 0094 (grade)
N50A 0147 (grade)	⅜"	147	250	2.5	0.6	7.5	2.0	1.4	E50HP 0147 (grade)
N50A 0265 (grade)	½"	265	450	4.5	1.5	12.0	5.9	6.2	E50HP 0265 (grade)
N50A 0324 (grade)	¾"	324	550	4.5	1.5	12.0	5.9	6.1	E50HP 0324 (grade)
N50A 0492 (grade)	1"	492	835	4.5	1.5	15.6	5.9	7.4	E50HP 0492 (grade)
N50A 0736 (grade)	1½"	736	1250	5.8	2.0	17.1	6.7	16.3	E50HP 0736 (grade)
N50A 1015 (grade)	1½"	1015	1725	5.8	2.0	17.1	6.7	16.3	E50HP 1132 (grade)
N50A 1132 (grade)	2"	1132	1925	5.8	2.0	17.1	6.7	15.8	E50HP 1132 (grade)
N50A 1882 (grade)	2"	1882	3200	5.8	2.0	25.0	6.7	21.9	E50HP 1882 (grade)

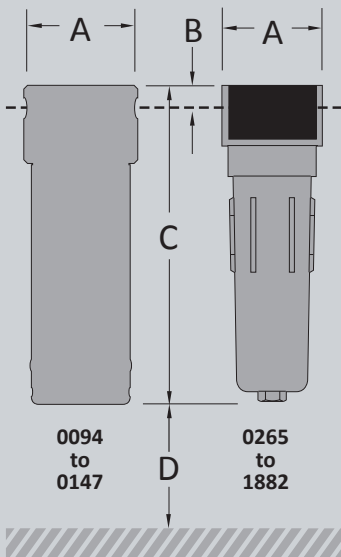

specifications

design operating pressure range	0 to 725 psig
condensate drain (included)	manual ball valve
filter housing material	machined & die cast aluminum

element performance

	M25	M5	M1	M01	AC
particle removal (microns)	25	5	1	0.01	-
max oil carry over at 68°F (ppm or mg/m ³)	10	5	0.1	0.01	0.003
recommended operating temp range (°F)	35 - 212	35 - 212	35 - 212	35 - 212	35 - 77
design operating temperature range (°F)	35 - 248	35 - 248	35 - 248	35 - 248	35 - 122

pressure correction factors

Operating Pressure (psig)	60	90	120	150	220	290	435	580	725
Correction Factor	0.14	0.22	0.28	0.34	0.47	0.56	0.70	0.85	1.00

- (1) At 725 psig. For all other pressures, refer to the pressure correction factor table above.
 (2) Differential pressure indicator not included.
 (3) Install with air flow from inside to outside for coalescing and from outside to inside for dry dust filtration.

