



## Safe Quality Food

meeting the SQF Air Quality Standard  
with point of use filtration

# what is the SQF air quality standard?

---

Safe Quality Food (SQF) is a food safety certification that provides companies with a rigorous process to minimize food safety risks. It also identifies their products to consumers as being protected by the highest level of safety standards. It covers all sectors of the food industry from production and manufacturing to distribution, packaging and wholesale. SQF is the only program recognized by the Global Food Safety Initiative (GFSI) that provides certification throughout the entire process from farm to fork. It is recognized by retailers and food service providers worldwide and identifies your company as a leader in food safety and quality management. It enhances your brand and builds retailer and consumer confidence in your products.



Edition 7 of the SQF Code requires that compressed air used in the production of food must be clean and present no risk to food safety. Furthermore, it must be regularly monitored for purity.

nano-purification solutions has a complete line of compressed air filters to meet and exceed the compressed air purity requirements of the SQF Code. Whether compressed air is being used in the production, manufacturing, conveyance and/or packaging of foods, nano filtration products eliminate compressed air as a potential source of chemical or microbiological contamination. High quality compressed air ensures the quality and safety of your products and helps you achieve SQF Certification.

## the contaminants in compressed air

---

The air around us is full of contamination including dust, pollen, bacteria, micro-organisms, smoke, exhaust, industrial pollutants and moisture. Air compressors draw in all of this contamination and concentrate it. Air at 100 psig has 7.8 times more contaminants per cubic foot than ambient air. In addition, the compressors themselves add oil as well as wear and rust particles to the air stream. Left untreated, the micro-organisms, mold and bacteria will quickly multiply in the warm, wet environment as they are fed a constant stream of Oxygen and food grade oil carried over from the compressor. Without proper treatment compressed air can be a significant source of contamination for any foods or surfaces the air comes into contact with.

Treatment at the source alone is not enough. As compressed air cools and loses pressure throughout the compressed air piping system, oil and moisture previously in vapor form will condense into a liquid. Even the piping can present a source of contaminants. For that reason, point-of-use filtration is required, ensuring contaminants are removed just before the air comes into direct - or even indirect - contact with food.

nano-purification solutions specializes in high efficiency point-of-use industrial and sterile air filters to remove solid and liquid contaminants down to 0.01 micron with up to 99.9999% efficiency. Our filters eliminate contaminants at the point of use eliminating the compressed air stream as a food safety risk factor.

## nano three stage filtration is the solution

---

**Option A:** When stainless steel is not required, nano offers cost effective F-Series<sup>1</sup> third party validated die cast aluminum filter housings with E-Coat™ internal coating and external powder coating.

The first stage consists of a nano NF filter with an M1 coalescing element to remove solid particulate and liquid aerosols to less than 1 micron. The second stage consists of a nano NF filter with M01 coalescing element to further removes solid particulate and liquid aerosols to 0.01 micron. The final stage is a nano NMS sterile air filter designed to remove bacteria and micro-organisms down to 0.01 micron.

**Option B:** When stainless steel is required, nano offers passivated and polished P-Series<sup>1</sup> 304 or 316 stainless steel housings designed for the most critical food and beverage applications.

The first stage consists of a nano IF filter with an M1 coalescing element to remove solid particulate and liquid aerosols to less than 1 micron. The second stage consists of a nano IF filter with an M01 coalescing element to further removes solid particulate and liquid aerosols to 0.01 micron. The final stage is a nano SD sterile air depth filter (or alternately SM sterile air membrane filter) designed to remove bacteria and micro-organisms down to 0.2 micron.

The stainless steel version of the final filter can even be steam sterilized *in situ*. To ensure the steam does not introduce harmful particulate into the process, nano offers a P-Series<sup>1</sup> SP culinary steam filter to remove particulate contamination.


These filtration systems are available in sizes from 1/4" NPT to 3" NPT and flow rates from 15 to 1500 scfm.

---

## option A: powder coated aluminum



## option B: polished stainless steel

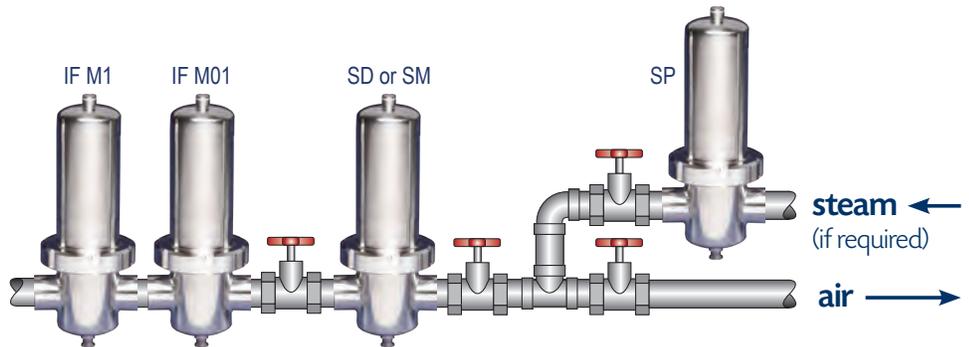

Third party validated performance



Dual o-ring sealed elements




A wide range of mounting options

# sizing & specifications

| Filter Models                           |              |             | Inlet & Outlet | Rated Flow <sup>(1)</sup> | Dimensions in inches (each) |      |                    |      | Weight (each) |      |
|---|--------------|-------------|----------------|---------------------------|-----------------------------|------|--------------------|------|---------------|------|
| First Stage                             | Second Stage | Final Stage |                |                           | NPT                         | scfm | Nm <sup>3</sup> /h | A    |               | B    |
| <b>Option A: Powder Coated Aluminum</b> |              |             |                |                           |                             |      |                    |      |               |      |
| NF 0015 M1                              | NF 0015 M01  | NMS 0015    | ¼"             | 15                        | 25                          | 1.97 | 0.71               | 5.98 | 2.95          | 1.1  |
| NF 0025 M1                              | NF 0025 M01  | NMS 0025    | ¼"             | 25                        | 42                          | 2.75 | 0.98               | 7.52 | 3.35          | 1.8  |
| NF 0035 M1                              | NF 0035 M01  | NMS 0035    | ¾"             | 35                        | 59                          | 2.75 | 0.98               | 7.52 | 3.74          | 1.8  |
| NF 0050 M1                              | NF 0050 M01  | NMS 0050    | ½"             | 50                        | 85                          | 2.75 | 0.98               | 9.13 | 5.31          | 2.0  |
| NF 0070 M1                              | NF 0070 M01  | NMS 0070    | ½"             | 70                        | 119                         | 3.94 | 1.38               | 10.9 | 6.10          | 4.4  |
| NF 0085 M1                              | NF 0085 M01  | NMS 0085    | ¾"             | 85                        | 144                         | 3.94 | 1.38               | 10.9 | 6.10          | 4.4  |
| NF 0175 M1                              | NF 0175 M01  | NMS 0175    | 1"             | 175                       | 297                         | 3.94 | 1.38               | 15.6 | 8.86          | 5.3  |
| NF 0280 M1                              | NF 0280 M01  | NMS 0280    | 1¼"            | 280                       | 476                         | 4.80 | 1.65               | 18.1 | 12.6          | 7.3  |
| NF 0325 M1                              | NF 0325 M01  | NMS 0325    | 1½"            | 325                       | 550                         | 4.80 | 1.65               | 18.1 | 12.6          | 7.3  |
| NF 0400 M1                              | NF 0400 M01  | NMS 0400    | 1½"            | 400                       | 680                         | 5.75 | 2.05               | 19.0 | 12.8          | 10.8 |
| NF 0450 M1                              | NF 0450 M01  | NMS 0450    | 2"             | 450                       | 765                         | 5.75 | 2.05               | 19.0 | 12.8          | 10.8 |
| NF 0700 M1                              | NF 0700 M01  | NMS 0700    | 2"             | 700                       | 1190                        | 5.75 | 2.05               | 30.9 | 24.8          | 15.4 |
| NF 0850 M1                              | NF 0850 M01  | NMS 0850    | 2½"            | 850                       | 1445                        | 8.27 | 2.60               | 23.4 | 16.1          | 21.1 |
| NF 1000 M1                              | NF 1000 M01  | NMS 1000    | 3"             | 1000                      | 1700                        | 8.27 | 2.60               | 23.4 | 16.1          | 21.1 |
| NF 1250 M1                              | NF 1250 M01  | NMS 1250    | 3"             | 1250                      | 2125                        | 8.27 | 2.60               | 32.1 | 24.8          | 25.5 |
| NF 1500 M1                              | NF 1500 M01  | NMS 1500    | 3"             | 1500                      | 2550                        | 8.27 | 2.60               | 38.4 | 30.9          | 28.8 |


| specifications                   | M1  | M01           | MS                 |
|----------------------------------|---|---------------|--------------------|
| particle removal                 | 1 micron  | 0.01 micron   | 0.01 micron        |
| max oil carry over at 68°F       | 0.1 ppm   | 0.01 ppm      | -                  |
| recommended operating temp range | 35 to 212°F   | 35 to 212°F   | 35 to 212°F        |
| DOP efficiency                   | >99.99%   | >99.999%      | >99.9999%          |
| design operating pressure range  | 0 to 232 psig                                       | 0 to 232 psig | 0 to 232 psig      |
| maximum element life             | 12 months   | 12 months     | 6 months           |
| steam or autoclave sterilization | no  | no            | yes <sup>(2)</sup> |
| filter housing material          | cast aluminum with E-Coat™ & powder top coat finish |               |                    |

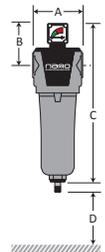

(1) At 100 psig. For all other pressures consult nano. (2) NMS filter (ONLY) is guaranteed for 100 steam sterilization cycles at 248°F. Maximum sterilization temperature: 273°F.

| Filter Models                             |               |              | Inlet & Outlet | Rated Flow <sup>(2)</sup> | Dimensions in inches (each) |       |                    |      | Weight (each) |                  |
|---|---------------|--------------|----------------|---------------------------|-----------------------------|-------|--------------------|------|---------------|------------------|
| First Stage                               | Second Stage  | Final Stage  |                |                           | NPT <sup>(1)</sup>          | scfm  | Nm <sup>3</sup> /h | A    |               | B <sup>(3)</sup> |
| <b>Option B: Polished Stainless Steel</b> |               |              |                |                           |                             |       |                    |      |               |                  |
| PF 0050 M1-N                              | PF 0050 M01-N | PF 0050 SD-N | ¼"             | 50                        | 85                          | 9.45  | 4.14               | 2.76 | 2.24          | 4.2              |
| PF 0065 M1-N                              | PF 0065 M01-N | PF 0065 SD-N | ¾"             | 65                        | 110                         | 9.45  | 4.14               | 2.76 | 2.24          | 4.4              |
| PF 0085 M1-N                              | PF 0085 M01-N | PF 0085 SD-N | ½"             | 85                        | 144                         | 9.45  | 4.25               | 2.76 | 2.24          | 4.6              |
| PF 0120 M1-N                              | PF 0120 M01-N | PF 0120 SD-N | ½"             | 120                       | 204                         | 9.45  | 4.92               | 2.76 | 2.24          | 5.1              |
| PF 0170 M1-N                              | PF 0170 M01-N | PF 0170 SD-N | 1"             | 170                       | 289                         | 11.40 | 4.92               | 3.35 | 2.78          | 7.3              |
| PF 0295 M1-N                              | PF 0295 M01-N | PF 0295 SD-N | 1 ½"           | 295                       | 501                         | 12.70 | 5.51               | 3.35 | 3.49          | 11.4             |
| PF 0460 M1-N                              | PF 0460 M01-N | PF 0460 SD-N | 2"             | 460                       | 782                         | 19.02 | 6.70               | 4.10 | 3.64          | 12.1             |
| PF 0680 M1-N                              | PF 0680 M01-N | PF 0680 SD-N | 2"             | 680                       | 1156                        | 29.37 | 6.70               | 4.10 | 3.64          | 15.0             |
| PF 0850 M1-N                              | PF 0850 M01-N | PF 0850 SD-N | 2 ½"           | 850                       | 1444                        | 29.53 | 7.17               | 4.10 | 3.80          | 15.2             |
| PF 1150 M1-N                              | PF 1150 M01-N | PF 1150 SD-N | 3"             | 1150                      | 1954                        | 40.04 | 7.17               | 4.10 | 3.96          | 19.4             |

| specifications                   | M1   | M01                          | SD                           |
|----------------------------------|--|------------------------------|------------------------------|
| particle removal                 | 1 micron   | 0.01 micron                  | 0.3 micron <sup>(4)</sup>    |
| max oil carry over at 68°F       | 0.1 ppm  | 0.01 ppm                     | -                            |
| recommended operating temp range | 35 to 120°F  | 35 to 120°F                  | 35 to 120°F                  |
| DOP efficiency                   | -  | -                            | >99.9999%                    |
| design operating pressure range  | 0 to 232 psig <sup>(5)</sup>   | 0 to 232 psig <sup>(5)</sup> | 0 to 232 psig <sup>(5)</sup> |
| maximum element life             | 12 months  | 12 months                    | 6 months                     |
| steam or autoclave sterilization | no   | no                           | yes <sup>(6)</sup>           |
| filter housing material          | 1.4301 quality 304 stainless steel passivated and polished to grade Ra <1.6um <sup>(7)</sup> |                              |                              |

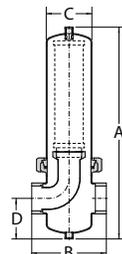

(1) Tri-clamp sanitary available as an option. (2) At 100 psig. For all other pressures consult nano. (3) +/- 0.118" (4) At 100% pleated depth. 0.2 micron membrane element available as an option. (5) 362 psig maximum operating pressure available as an option. (6) SD element (ONLY) is steam sterilizable. Maximum element sterilization temperature is 257°F for 20 minutes at 30 psia. (7) 1.4404 quality 316L stainless steel available as an option.

nano-purification solutions  
11330 Vanstory Drive  
Huntersville, NC 28078  
USA

Tel: (704) 897-2182  
Fax: (704) 897-2183  
Email: support@n-psi.com  
web: www.n-psi.com

**nano**

PURIFICATION SOLUTIONS